

# SCALACOUSTIC

CI/SfB | (35) | Xy |  
02/2011



[www.armstrong.eu](http://www.armstrong.eu)

**Armstrong®**

# SCALACOUSTIC



Recycled Content



Light Reflectance


SCALACOUSTIC	BOARD	PASSO
	<p>Prelude XL<sup>2</sup>/TLX 24 mm Prelude Sixty<sup>2</sup></p>	<p>Prelude XL<sup>2</sup>/TLX 24 mm Prelude Sixty<sup>2</sup></p>
600 x 600 x 12 mm	3070 M	3071 M



EN ISO 354 &  
EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.60</b>	0.55	0.35	0.35	0.55	0.75	0.65	0.60	$\alpha_p$

Sound Absorption Class = C

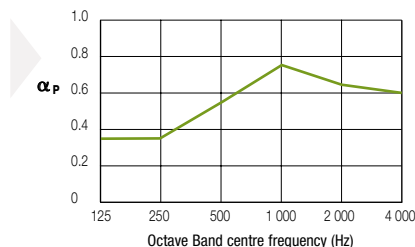

EN ISO 10848-2  
/ EN 20140-9  
& EN ISO 717-1

<b>Dncw</b>	
<b>32 dB</b>	



EN 13501-1

EEA	Euroclass A2-s1, d0
-----	---------------------



EN 12667  
& ISO 8301

$\lambda = 0.06$  W/m K



90 % RH



$\approx 2.7$  kg/m<sup>2</sup>



PX1105

Armstrong Building Products

R.C.S. Besançon B 784 131 575

Printed in E.C. on chlorine free paper from sustainable resources.

- Please contact our Armstrong Technical Sales group for further details.

[www.armstrong.eu](http://www.armstrong.eu)

