


■ WATER OUTLET "SHORT"

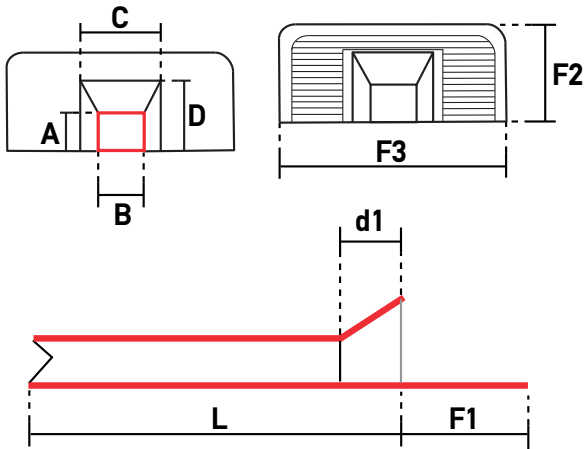

Product	A	B	C	D	L	d1	F1	F2	F3
BOC02-1118	48	56	50	84	345	60	120	120	270

■ INDEX

1. Code Registry
2. Use
3. Installation
4. Technical Specification

■ 1. CODE REGISTRY

Product code	Description	Available dimensions (mm)	Packaging (box/pallet)	Weight (gr.)
BOC02-1118	Water outlet "short"	345	20 pc./240 pc.	300 gr./pc.

MATERIAL: Made of TPE (thermoplastic elastomer).
COLOUR: Black

■ 2. USE


Used for the complete evacuation of rainwater in roof.

WATER OUTLET "SHORT"



3. INSTALLATION

- Apply a coat of primer in the area around the hole.
- Apply a first layer of cover membrane.
- Insert the plug in the hole and mark the point in which it must be cut.
- Heat the surface of the waterproof membrane, then adhere to the outlet flange.
- Heat a small piece of membrane. Spread with a spatula on the flange to enable the pipe to adhere to the cover membrane.
- Apply a second waterproofing layer, heating the bitumen, after covering both the flange and the membrane.

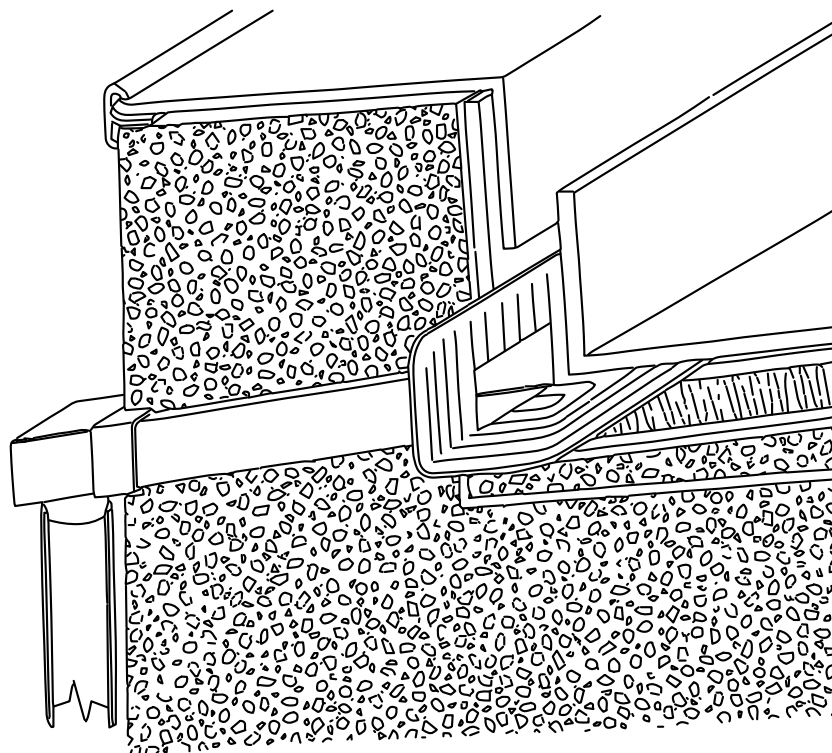

4. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.O.BOC02.1118	Supply and installation of water outlet with a flange corner and a tube of square shape 48 x 56 mm and long 345 mm. Made of TPE (thermoplastic elastomer). Used for the complete evacuation of rainwater in roof. Dimension 345 mm.....	pc.	-